




Energy saving upto 60%

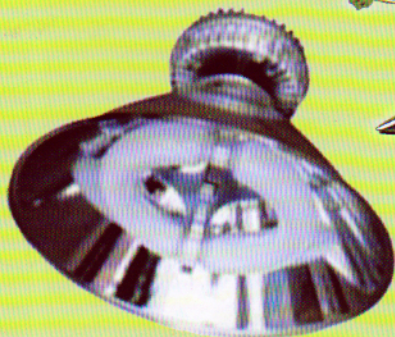

POWERTRAC INC
Traction Battery & Forklift Hiring

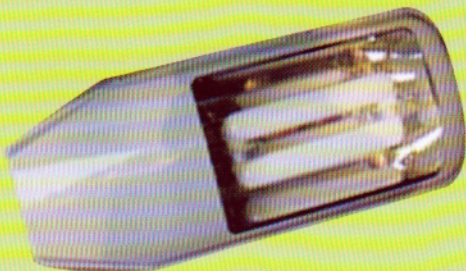

POWERTRAC INC


Let there be Light!

Total Lighting Solutions under one roof...

Traction Battery ,Spares & Services, Old no.31,New No .1, 2nd Floor,
A.M.Road Journalist Colony, J.c. Road Bangalore-560 002 .

Phone : +91 80-26706676,+91 80-41519091, Fax: +91 80-41519091, Mobile : +91 98458 36990

Email : powertracinc@airtelmail.in, Website : www.powertracinc.com

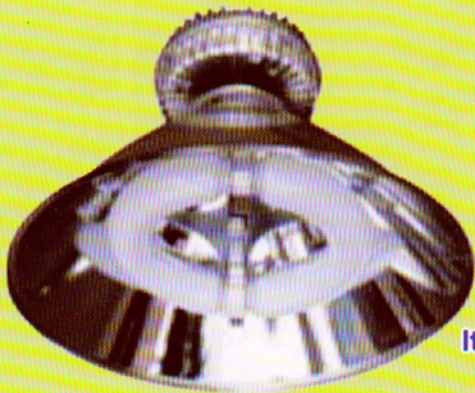

ALD INDUCTION HIGHBAY FITTING

energy saving upto 60%

Item Code : VJHB 60 / 80 /120 /150 /200

- ❖ Power Consumption : 60 / 80 / 120 / 150 / 200 Watts
- ❖ Working Voltage : 220 / 270 V / (12v for 40 & 60W available)
- ❖ Input Voltage bandwidth : 130 V to 270 V.
- ❖ Power Factor : ≥ 0.98
- ❖ Instant Start up
- ❖ Nominal Lumens output of 85 lum / w
- ❖ Visible Lumens output of 130 lum / w
- ❖ Luminous Flux : 3200 / 6400 / 9600 / 12000 / 16000.
- ❖ Certifications : CE
- ❖ Beam Spread Replaces : HID 70W / 150W / 250W / 400W.
- ❖ Colour Temperature : 2700 (UW) / 3500 (W) / 5000 (D) / 6500 (UD).

Salient Features:

- ❖ Die cast aluminum ballast housing finished light grey
- ❖ Hinged diffuser cover for ease access to lamp and control gear
- ❖ Mechanical clamps to ensure IP integrity
- ❖ 6mm toughened tempered diffuser
- ❖ UV anti-ageing silicon gasket
- ❖ Reflectors made of high purity aluminum up to 80% reflectance
- ❖ **Warranty : 60 Months for lamp / 36 Months for control gear.**


Optional:

- ❖ Nano-Grade reflector with up to 94% of direct and diffuse reflectance
- ❖ Frost glass / PC diffusers

Installation: Ceiling Mount, suitable for chain fixing.

Applications:

- ❖ Warehouse / Car Park / Repair and Maintenance Centre / Factory / Hypermarkets

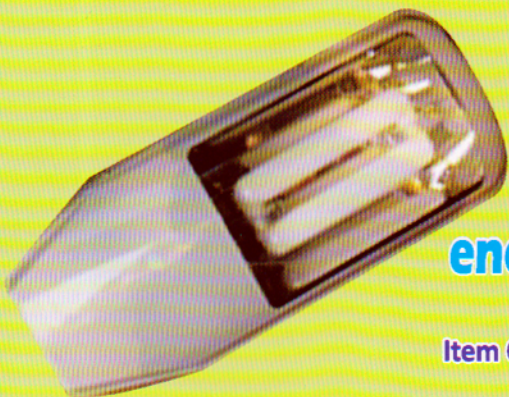

ALD INDUCTION STREET LIGHT

energy saving upto 60%

Item Code : VJISL 40 / 60 / 80 /120 /150/200

- ❖ **Power Consumption** : 40 / 60 / 80 / 120 / 150 / 200 Watts
- ❖ **Working Voltage** : 220 / 270 V / (12v for 40 & 60W available)
- ❖ **Input Voltage bandwidth** : 130 V to 270 V.
- ❖ **Power Factor** : ≥ 0.98
- ❖ **Instant Start up**
- ❖ **Nominal Lumens output of 85 lum / w**
- ❖ **Visible Lumens output of 130 lum / w**
- ❖ **Luminous Flux** : 3200 / 6400 / 9600 / 12000 / 16000.
- ❖ **Certifications** : CE
- ❖ **Beam Spread Replaces** : HID 70W / 150W / 250W / 400W.
- ❖ **Colour Temperature** : 2700 (UW) / 3500 (W) / 5000 (D) / 6500 (UD).

Salient Features:

- ❖ Die cast aluminum ballast housing finished light grey
- ❖ Front side clamp locking topology to ease access to lamp and control gear
- ❖ Mechanical clamps to ensure IP integrity
- ❖ 6mm toughened tempered diffuser
- ❖ UV anti-ageing silicon gasket
- ❖ Reflectors made of high purity aluminum up to 80% reflectance
- ❖ **Warranty : 60 Months for lamp / 36 Months for control gear.**

Optional:

- ❖ Nano-Grade reflector with up to 94% of direct and diffuse reflectance

Installation: Pole Mounting , suitable for wall mounting.

Applications:

- ❖ Perimeter area / Road lighting / Car Park / Factory outer area



ALD INDUCTION FLOOD LIGHT

energy saving upto 60%

Item Code : VJIFL 40 / 80 /120 /150 / 200

- ❖ **Power Consumption** : 40 / 60 / 80 / 120 / 150 Watts
- ❖ **Working Voltage** : 220 / 270 V / (12v for 40 & 60W available)
- ❖ **Input Voltage bandwidth** : 130 V to 270 V.
- ❖ **Power Factor** : ≥ 0.98
- ❖ **Instant Start up**
- ❖ **Nominal Lumens output of 85 lum / w**
- ❖ **Visible Lumens output of 130 lum / w**
- ❖ **Luminous Flux** : 3200 / 6400 / 9600 / 12000 / 16000.
- ❖ **Certifications** : CE
- ❖ **Beam Spread Replaces** : HID 70W / 150W / 250W / 400W.
- ❖ **Colour Temperature** : 2700 (UW) / 3500 (W) / 5000 (D) / 6500 (UD).

Salient Features:

- ❖ Die cast aluminum ballast housing finished light grey
- ❖ Rear side screw locking topology to ease access to lamp and control gear
- ❖ Screw Locking topology to ensure IP integrity
- ❖ 6mm toughened tempered glass with wide angle viewing
- ❖ UV anti-ageing silicon gasket
- ❖ Reflectors made of high purity aluminum up to 80% reflectance
- ❖ **Warranty : 60 Months for lamp / 36 Months for control gear.**

Optional:

- ❖ Nano-Grade reflector with up to 94% of direct and diffuse reflectance

Installation: Wall Mounting , suitable for structure mounting.

Applications: Focusing front elevation of buildings / Stage lighting /
Open Stadium / Factory outer area